



SMART PRIVACY INSTALLATION

05.01.2017

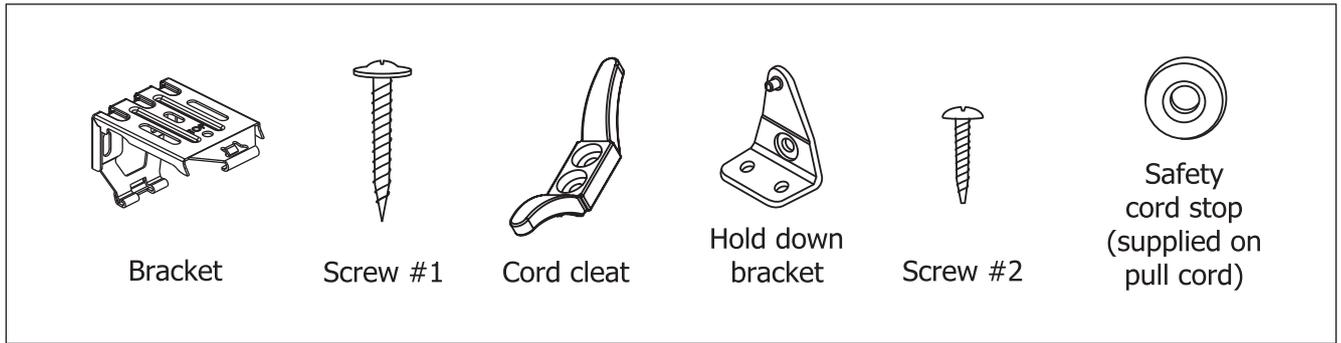


IMPORTANT NOTES:

1. Please check that all parts have been supplied before you begin to assemble your new Smart Privacy Venetian Blind.
2. Ensure that the blind is mounted level for correct operation.

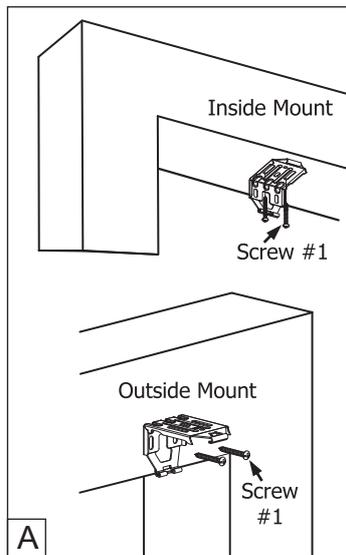


- A)** Select the method of mounting the blind that best suits your purpose.
- a) Inside window frame
 - b) On the outside of frame

- B)** Using a level and pencil, mark the bracket location on the mounting surface. Attach the brackets with screws provided (#1).

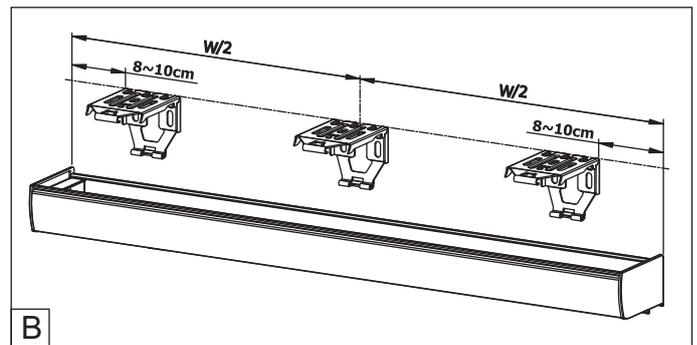

- C)** Install the headrail. For proper installation, start by attaching the front rail to the bracket, then push back up until the headrail click into the brackets.

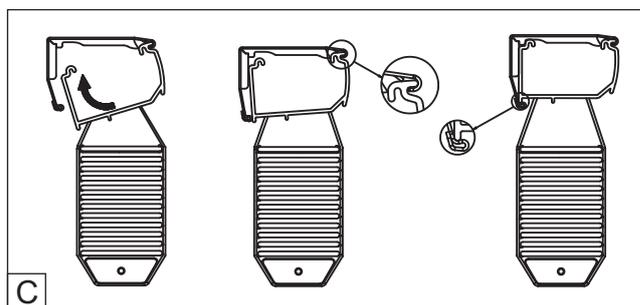

- D)** Blind is bundled tightly for delivery purposes. Pull the cord to raise and lower the blind. The slats need to be open when lowering the blind. The proper way to raise the blind is to support bottom rail with your hand while pulling on the cords (45 degree). Pull the cord toward the outside of the blind to lock the position. Pull toward the centre to release the position.

Notice - Lifting Requirement

For blind width 150cm and over

Large blinds (150cm and over) are not suitable to be repeatedly lifted due to their weight. When raising large blinds, have another person assist by lifting the bottom rail with both hands whilst the pull cord is being operated.

To Operate the Blind:

Important – always tilt the slats horizontally before raising or lowering the blind.

This will extend the life of the blind, and makes the movement easier and smoother.

Raising & Lowering: The Insta-Lock feature, locks the blind at any position and at any angle, effortlessly without frustrating tugging, even on corner windows. It is designed to stop at any position, any angle with no need to pull the cord to the right.

Tilting: Pull either tilt cord downwards to attain desired slat position. Pull other cord downwards to tilt in opposite direction

WARNING!

Blinds must be fitted with safety devices provided to comply with legal requirements. Please turn over leaflet for instructions to fit safety devices.




WARNING - ALL WINDOW COVERINGS WITH CORD OR CHAIN

To avoid creating a possible strangulation hazard for children, the corded or chained internal window covering must be installed in such a way that a loose cord or chain cannot form a loop 220mm or longer at a height of less than 1600mm above floor level.

- * A cord/chain guide may be installed lower than 1600mm above floor level if the cord/chain is sufficiently secured or tensioned to prevent a loop 220mm or longer from being formed.
- * If a cord/chain guide is installed lower than 1600mm above floor level, it must be designed to prevent a child from being able to remove the cord/chain.
- * If a cleat is used to secure the cord, it must be at least 1600mm above floor level because a child is capable of unwinding a cord from a cleat.

Installing Cord Cleat




Cord cleats must be installed to comply with Regulations.

The cleats must be installed at least 1600mm above floor level, because a child is capable of unwinding a cord from a cleat.

Fasten the cleats to the wall using the screws provided. Do not use tape or glue to attach the cleats.

Note: the cord must be wrapped around the cord cleat to prevent child strangulation. **The cord must not form a loop longer than 220mm, and should be wound entirely around the cleat.**

Installing Hold Down Bracket (optional)




The use of hold down brackets is recommended for additional child safety, but is not a requirement for the normal functioning of the blind.

Using the two screws provided, attach the base of the hold down bracket to the window facing or sill. Additional fixing can also be fitted through the side of the bracket (where suitable). Snap bracket pin ends into the holes in the ends of the bottom rail.


Adjust Safety Cord Stop

To reduce the risk of strangulation to infants and toddlers, position safety cord stops before using the blind.



Install blind according to the directions provided, making sure the headrail is securely fastened. Lower the blind to the maximum desired length, and lock the cords in place.

Measure the distance from the headrail to the cord stops. If the cord stops are 25 to 50mm below the headrail, no further adjustment is needed. Your blind is ready to use.



If cord stops ARE NOT 25 to 50mm below the headrail, loosen (but do not untie) the knot surrounding the cord stop.

Push both the cord stop and the loosened knot toward the headrail until the cord stop is 25 to 50mm below the headrail. Hold the cord stop in place and pull firmly on the cord to retighten the knot. Repeat steps 2, 3 & 4 for each cord stop.

How to Adjust Pull Cord Length / Reassemble Breakaway Tassel

Our blind comes equipped with a breakaway tassel that prevents child strangulation. Should the breakaway tassel come apart, please refer to Step 4.

NOTE : To reassemble breakaway tassel refer to Step 4, otherwise proceed with Step 1 to adjust pull cord lengths.

1. After determining desired height of breakaway tassel, open breakaway tassel.
2. Raise the breakaway tassel to desired height and tie knot to each pull cord end.
NOTE : make sure all pull cord lengths is even before proceeding.
3. Cut excess pull cords, beneath knots, using scissors.
4. Place pull cords into grooves and snap breakaway tassel together to close.

