



CORDLESS VENETIAN BLIND INSTALLATION

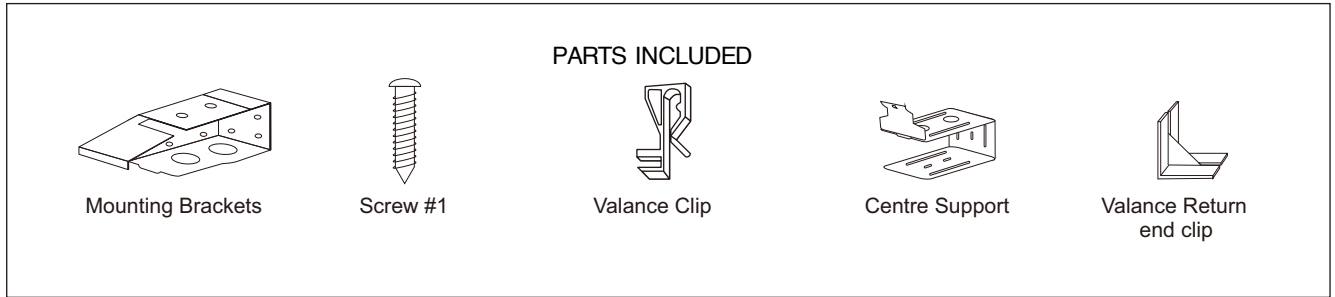


IMPORTANT NOTES:


1. Please check that all parts have been supplied before you begin to install your new Cordless Venetian Blind.
2. Ensure that the blind is installed level for correct operation.

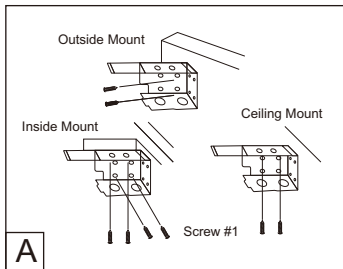

A) The mounting brackets should be fitted 6mm past each end of the head-rail using screw #1. The bracket doesn't necessarily need to touch the inside face of the window frame.

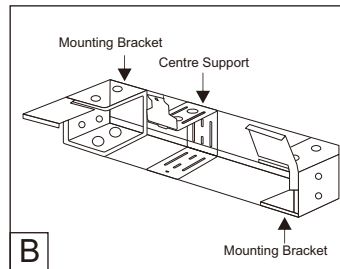


B) Align the top of the centre support bracket with the top of the mounting bracket before installation. Install with the bigger flap of the centre support bracket on the top side. Ensure bracket is clear of ladder cords prior to installing.

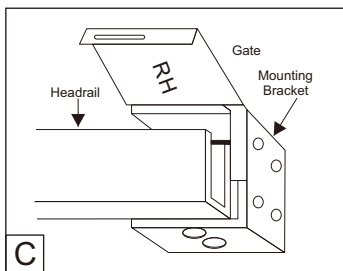


C) Push the head-rail into the brackets, then press bracket cover in to place until it clicks.

Inside mount - refer to step D before you close bracket covers.

For Inside Mount

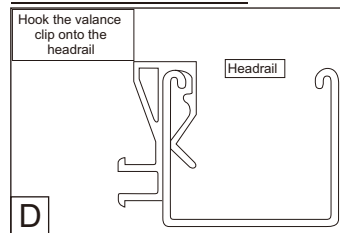


D) Before inserting the head-rail in the mounting brackets, hook the valance clips on to the head-rail. Insert the head-rail in to the mounting brackets as in figure C.

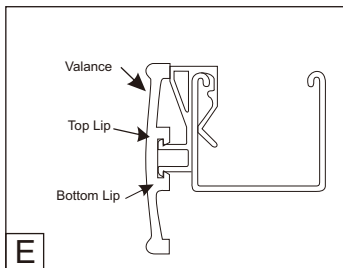


E) To attach the valance, gently guide the bottom lip of the valance clip into the groove at the back of the valance. Place pressure on the front side of valance until you hear a click. The Valance is now attached to the clip. See display E.


For Outside Mount

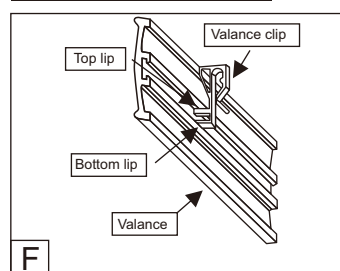

F) Attach the valance clip to the valance.

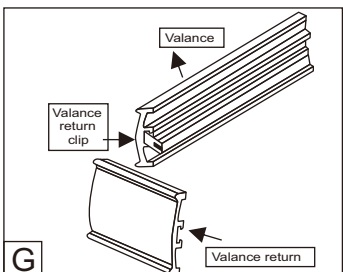

G) Insert the valance return clip into the groove at each end of valance and valance return.

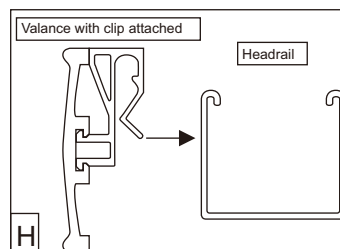

H) Hook the valance clip with the valance attached to the top of the head-rail.

To Operate the Blind:

Important:
 Always tilt the slats to the horizontal position before raising or lowering the blind.
 To operate up/down use the rebated bottom-rail for assisted lift/drop.
 Turn the wand for tilt function to open/close slats.

WARNING!

Blinds must be fitted with safety devices provided to comply with legal requirements